

NUTT

center lock adapter installation instructions

**LANXI JIEKE SPORTS APPARATUS
MANUFACTURING CO., LTD**

—. Prepare assembly part

1. Flange for center lock adapter
2. cassette disc break rotor(6-hole)
3. shim for center lock adapter
4. shim for center lock ring
5. center lock ring for rotor
6. locking wrench

—. Assembly step

1. Install the flange on the hub shell (figure 1)


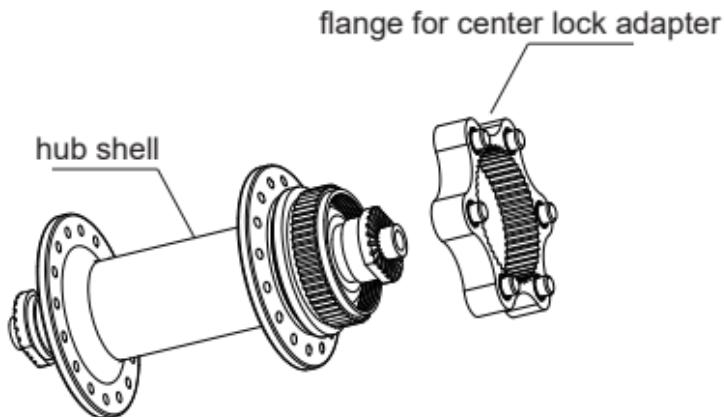


figure 1

2. Install the 6-hole rotor on the center lock flange, during assembly, attention that 6-hole corresponds to the flange, the specification mark of rotor outward and the arrow direction must be consistent with the rotation direction of the wheel (figure 2).

Caution: Pay attention to the arrow direction of the rotor, If the rotor is incorrectly installed, next steps cannot be continued, if proceed, the wheel hub may be damaged

figure 2

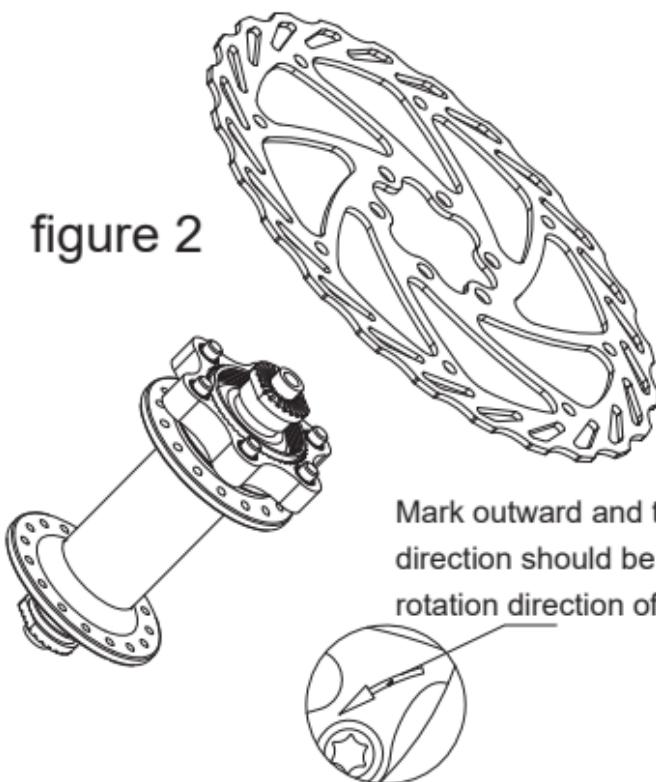

3. Install the shim on the flange of center lock adapter, attention that 6 holes corresponding (figure 3) .

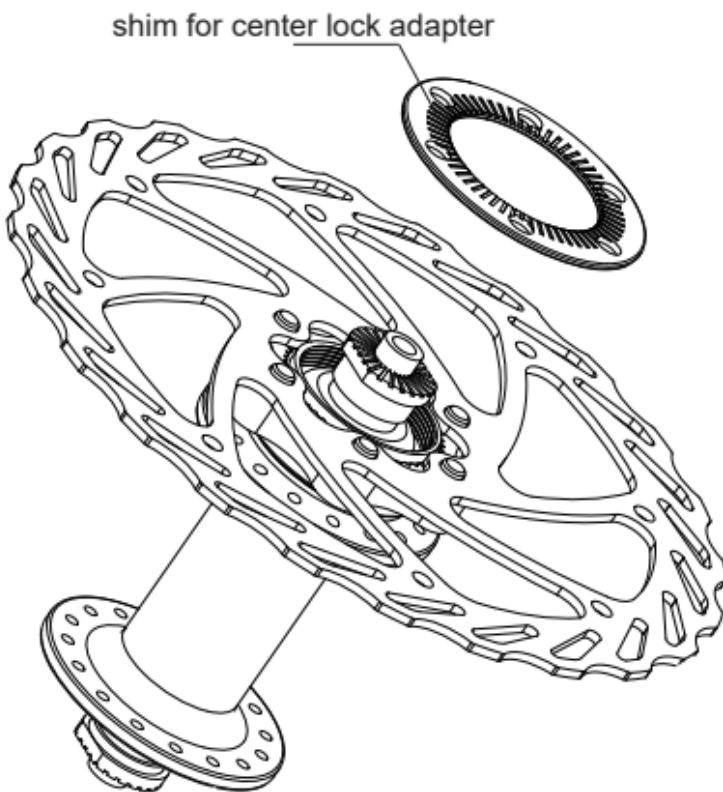


figure 3

4. Combine the shim with lock ring(already combined when received product,please proceed directly to the next step) (figure 4)

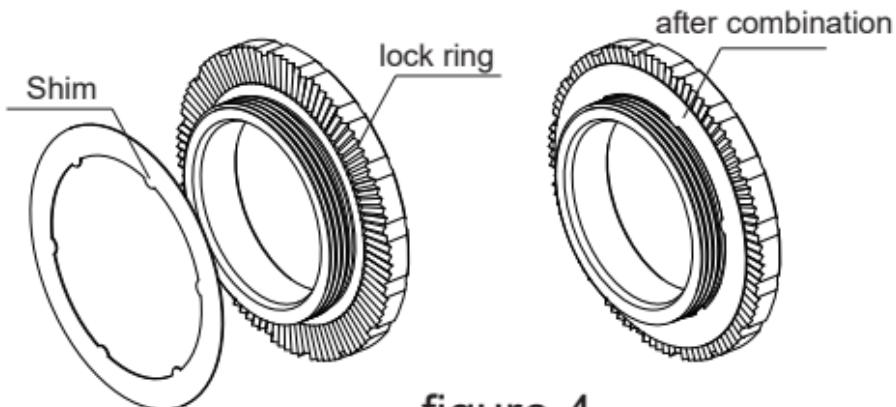


figure 4

5. Put the lock ring into the hub shell and locking by wrench (locking torque is 40N.m)

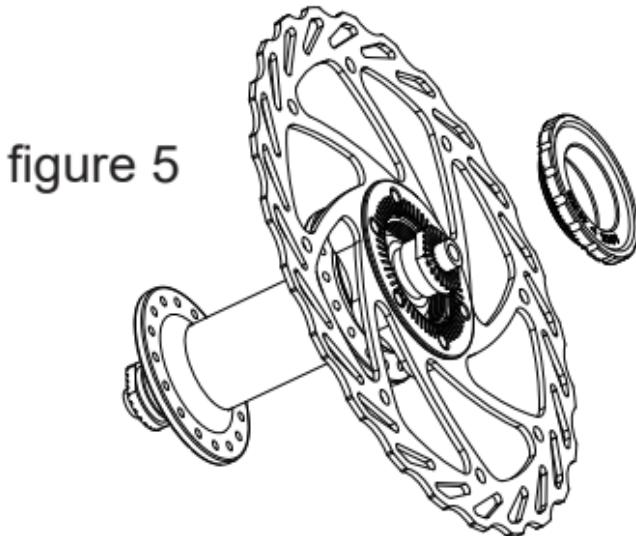


figure 5



locking wrench
Torque
70-90 kgf-cm

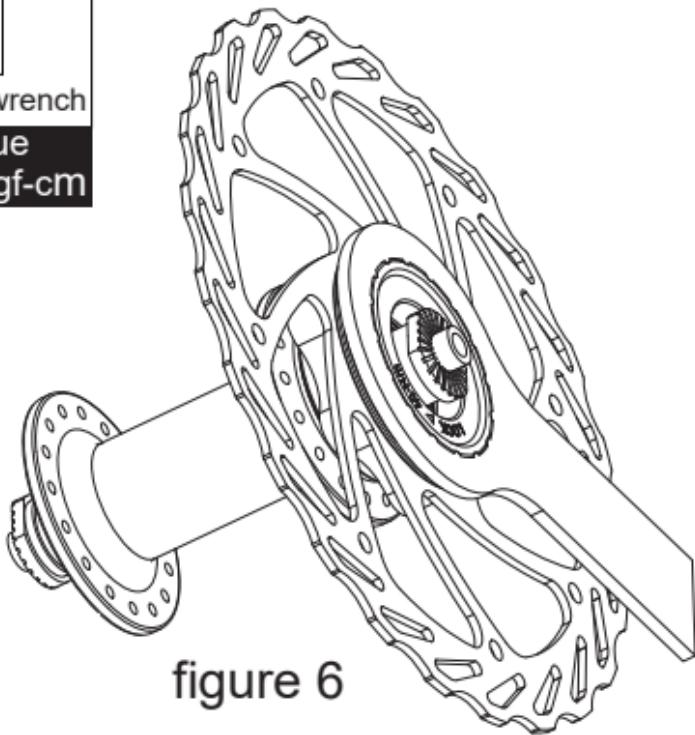


figure 6

NUTT



JK-SMS-ZSZ-E001-B

LANXI JIEKE SPORTS APPARATUS MANUFACTURING CO.,LTD.

Address: No.93 Gaoxin Avenue, Shanghua Street,
Lanxi City.Jinhua province,Zhejiang province

Zip:321100

Tel:+8657988948936 88988019

Fax:+8657988988075

[Http://www.discbrake.cn](http://www.discbrake.cn)

E-MAIL:nx@discbrake.cn wx@discbrake.cn